


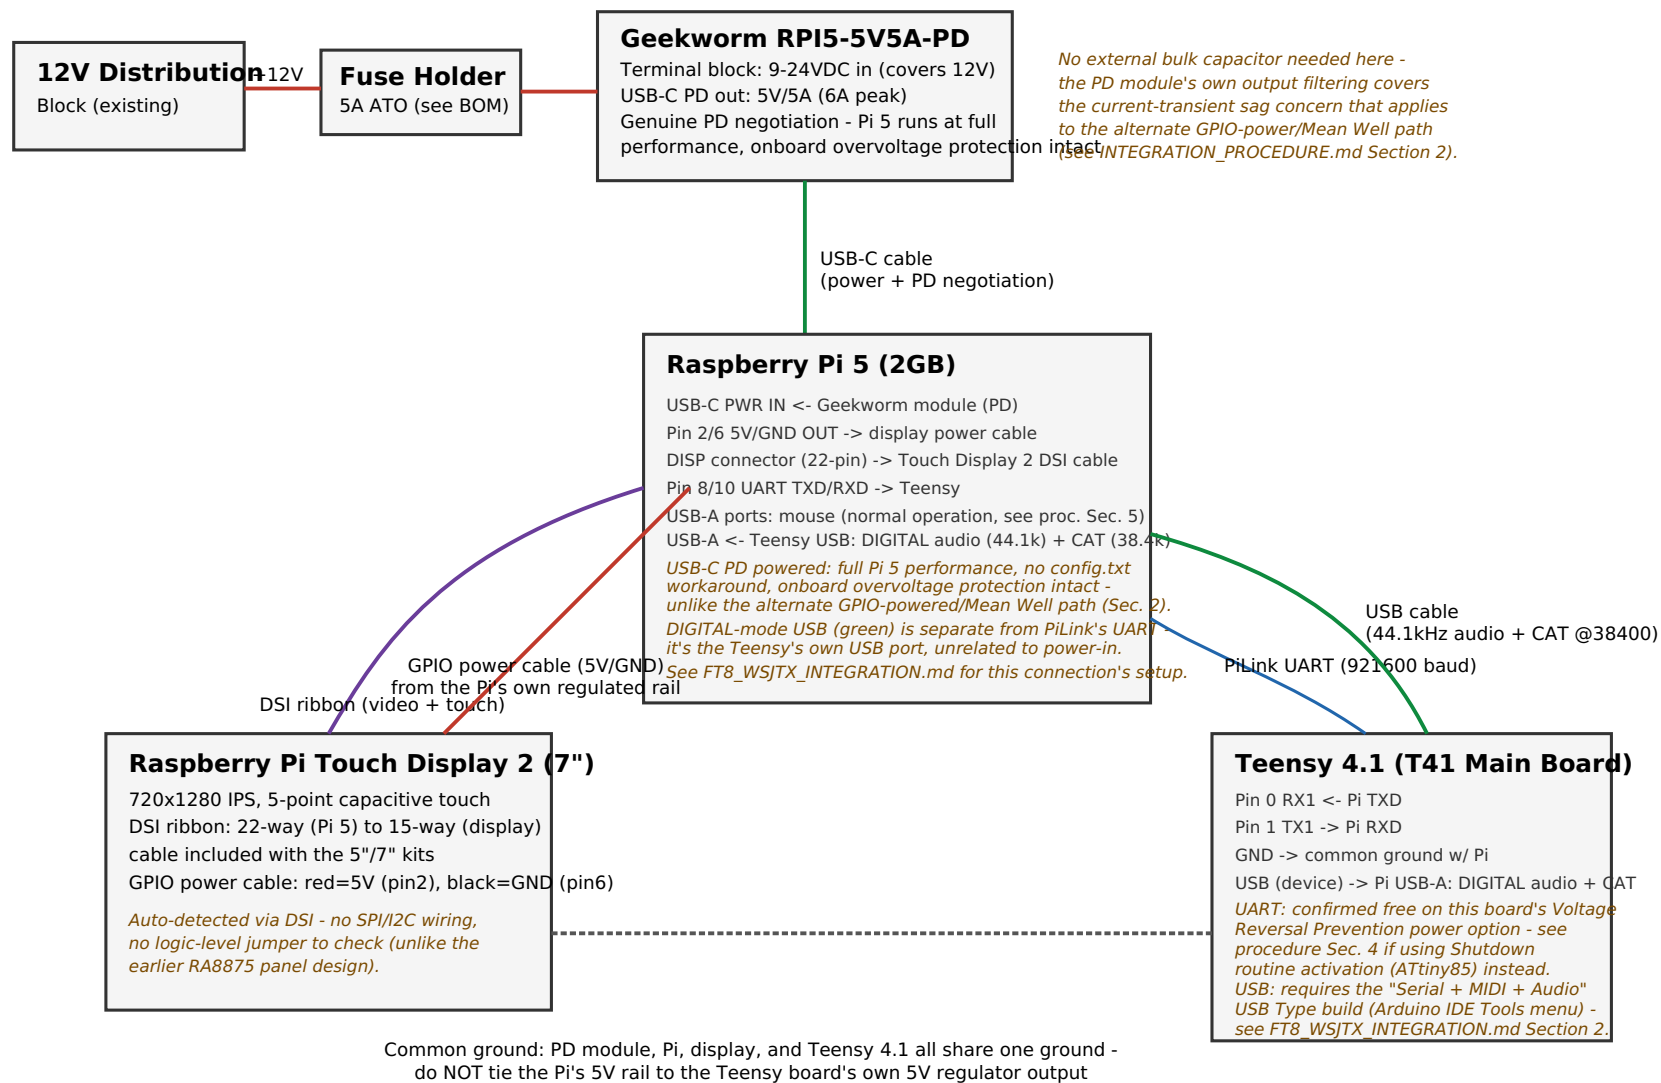

See INTEGRATION_PROCEDURE.md for the display/power build, FT8_WSJTX_INTEGRATION.md for the green USB connection.

Revision: shows the recommended USB-C PD power path (Geekworm RPI5-5V5A-PD) - the alternate GPIO-powered/Mean Well converter path is documented in the BOM but not pictured here.

Adds the Teensy-to-Pi USB cable (green) for DIGITAL-mode audio + CAT - separate from, and in addition to, the blue PiLink UART link. No new parts: it's a standard USB cable into the Teensy's existing USB